Stainless Steel Security Solutions

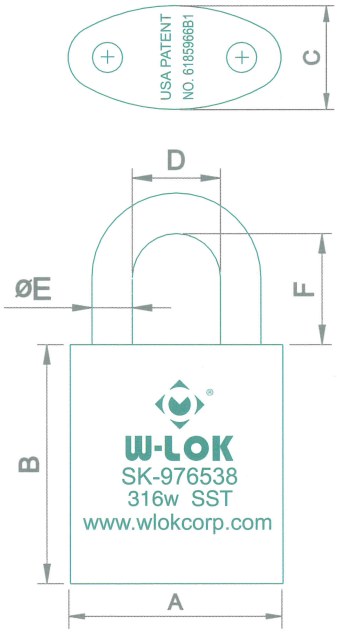



Stainless Steel Ovallok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F								TYPE OF L STOP PIN
SK-976538	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-976524	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-977524	2.84" (72.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A

*Contact us for details about co-branding.

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK
W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0030

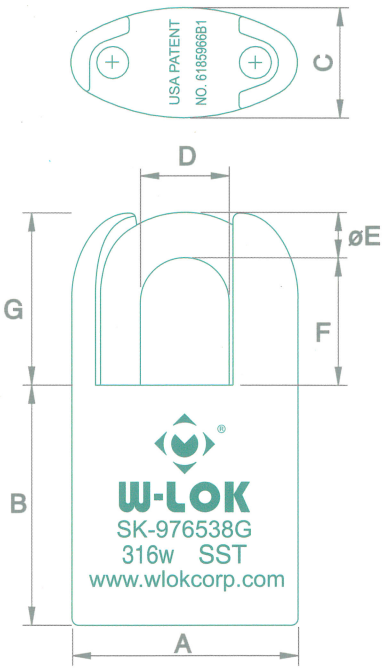

Stainless Steel Guarded Ovallok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-976538G	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	A
SK-976524G	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	1.26" (32.0)	1.65" (42.0)	A
SK-977524G	2.84" (72.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	A

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

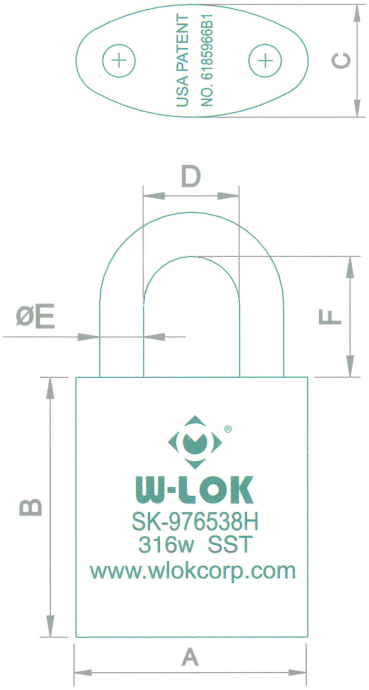

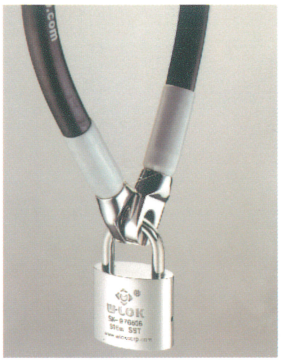

Stainless Steel Oval Maxilok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							
SK-976538H	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

0110

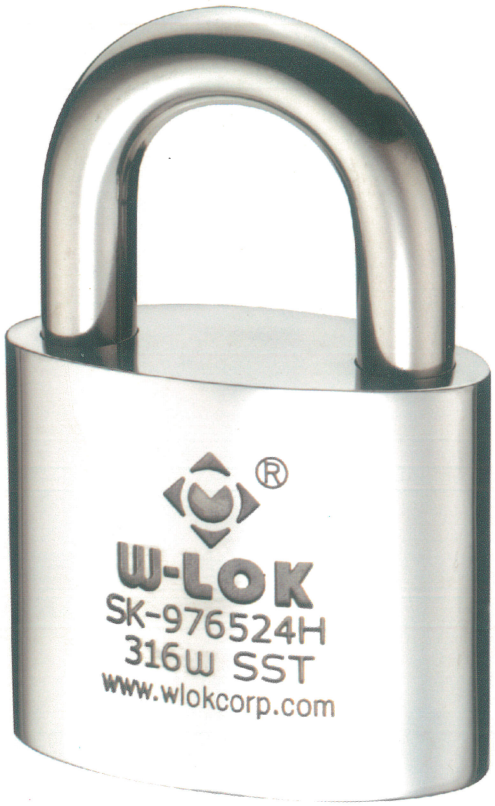

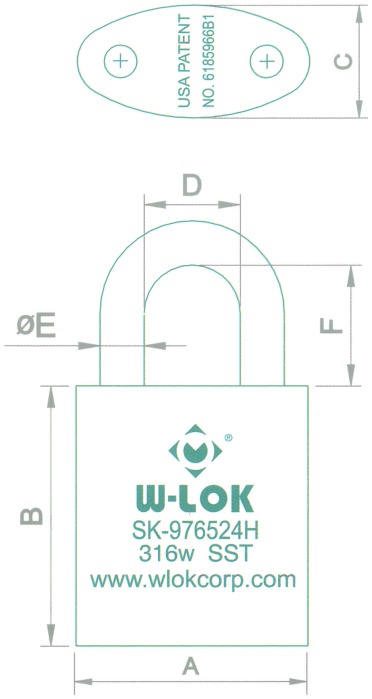

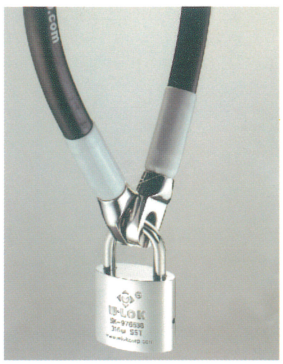

Stainless Steel Oval Maxilok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							
SK-976524H	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)
SK-977524H	2.84" (72.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

Stainless Steel Security Solutions

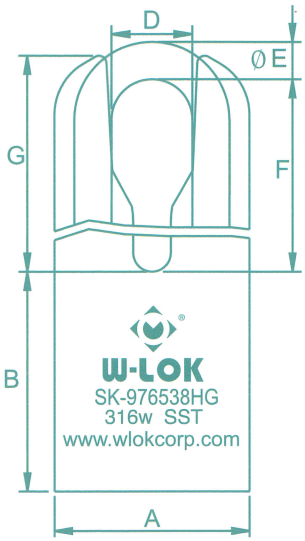



Stainless Steel Disclok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle makes the Disclok suitable for use as a motorcycle brake lock.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Lock body dust cover included.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F				G			
SK-976538HG	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3.3" (83.8)	4.3" (109.2)	5.3" (134.6)	6.3" (160.0)

*Contact us for details about co-branding.

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0130

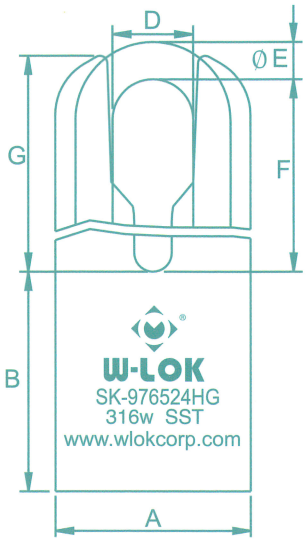



Stainless Steel Disclok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle makes the **Disclok** suitable for use as a motorcycle brake lock.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Lock body dust cover included.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F				G			
SK-976524HG	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3.3" (83.8)	4.3" (109.2)	5.3" (134.6)	6.3" (160.0)
SK-977524HG	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3.3" (83.8)	4.3" (109.2)	5.3" (134.6)	6.3" (160.0)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

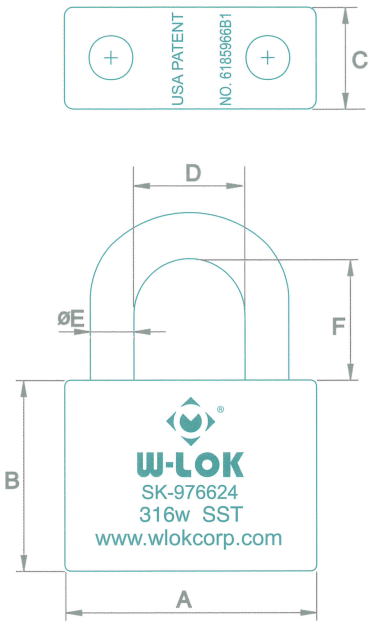



Stainless Steel Padlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents



*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F								TYPE OF L STOP PIN
SK-976624	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-977624	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A

*Contact us for details about co-branding.

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0040

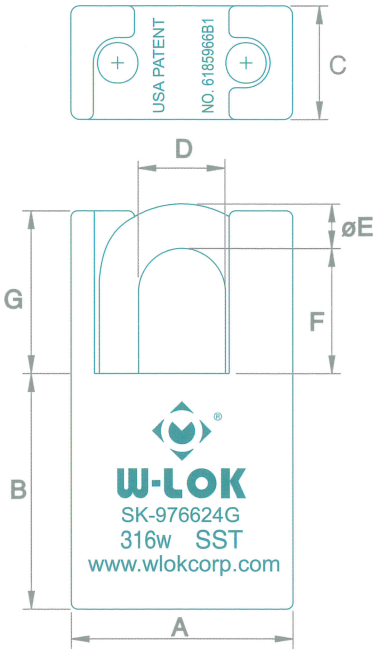

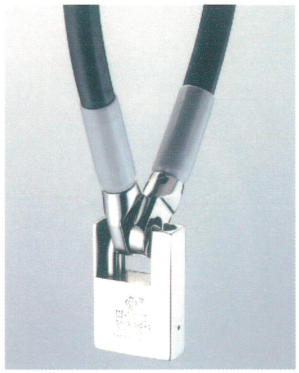

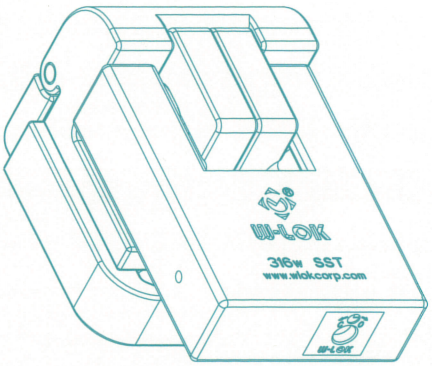

Stainless Steel Guarded Padlok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-976624G	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	1.26" (32.0)	1.65" (42.0)	A
SK-977624G	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	A

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

Stainless Steel Security Solutions

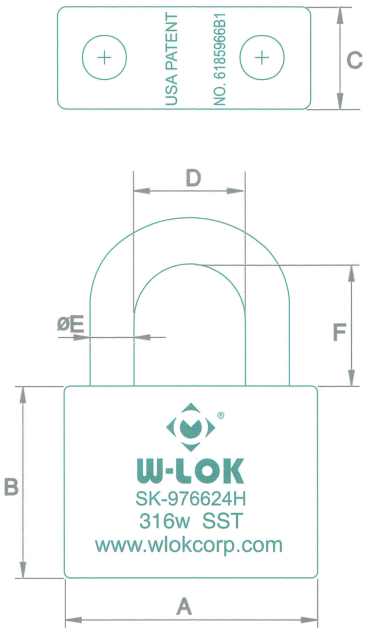



Stainless Steel Maxi Lok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							
SK-976624H	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)
SK-977624H	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.0" (25.4)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)

*Contact us for details about co-branding.

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0120

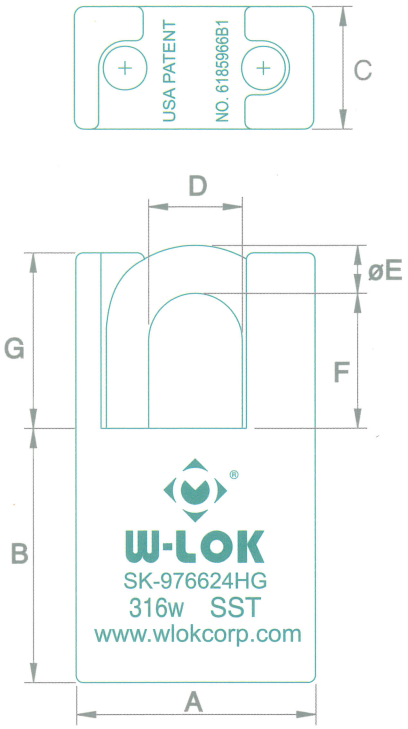



Stainless Steel Guarded Maxilok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice. UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G
SK-976624HG	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	1.26" (32.0)	1.65" (42.0)
SK-977624HG	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile: 31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone : 886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

W-LOK

Stainless Steel Security Solutions

100% STAINLESS STEEL HASP

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

0160

Stainless Steel Security Solutions

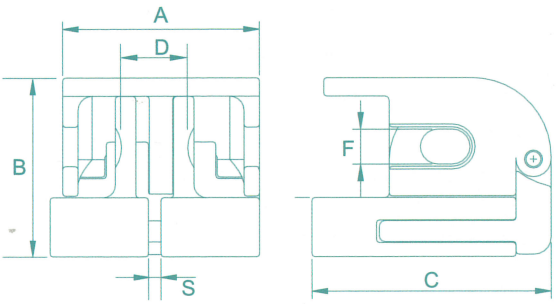

SK-60L24~SK-100L24

Stainless Steel Hasp

- 100% stainless steel with brushed finish.
- Specially designed to fit all **W-LOK** locks.
- For maximum security, the user is advised to weld the nuts to the exposed threads of the 10M bolts after securely tightening the nuts. Alternatively, the user could employ any other method to deform the exposed threads after securely tightening the nuts to prevent removal of the nuts with conventional hand tool.
- Protected by worldwide patents.

*Specifications are subject to change without notice. UNIT: inch / (mm)

Model No.:	A	B	C	D	F	S
SK-60L24	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.49" (12.5) ~ 0.65" (16.5)	0.59" (15.0)	0.00" (0.0) ~ 0.16" (4.0)
SK-60R24						
SK-70L38	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.81" (20.5) ~ 1.19" (30.2)	0.41" (10.3)	0.00" (0.0) ~ 0.38" (9.60)
SK-70R38						
SK-70L24	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.81" (20.5) ~ 1.25" (31.7)	0.53" (13.5)	0.00" (0.0) ~ 0.44" (11.2)
SK-70R24						
SK-75L24	2.95" (75.0)	2.50" (63.5)	3.35" (85.0)	0.97" (24.7) ~ 1.25" (31.7)	0.53" (13.5)	0.00" (0.0) ~ 0.29" (7.0)
SK-75R24						
SK-100L24	3.94" (100.0)	2.50" (63.5)	3.50" (89.0)	0.99" (25.2) ~ 1.21" (30.6)	0.53" (13.5)	0.00" (0.0) ~ 0.21" (5.4)
SK-100R24						

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

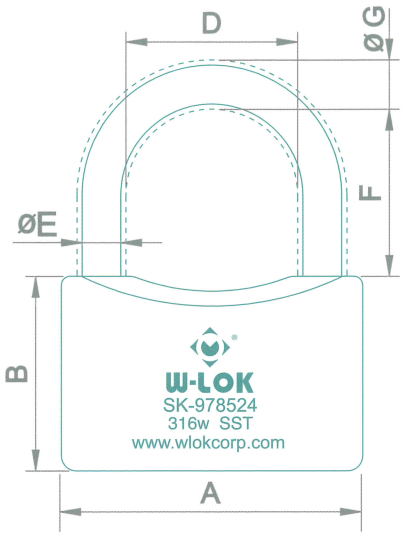



Stainless Steel MegaLok

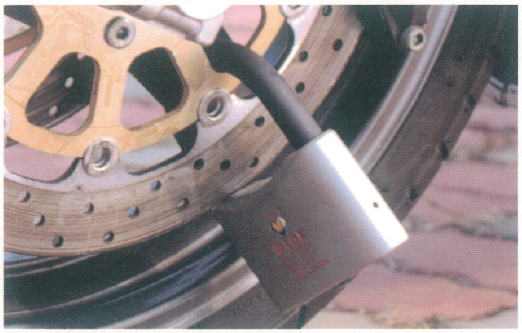

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F					ØG
SK-978524	3.98" (101.0)	2.56" (65.0)	1.26" (32.0)	2.28" (58.0)	1/2" (12.7)	2.21" (56.0)	4.00" (101.6)	9.00" (228.6)	10.00" (254.0)	12.00" (304.8)	0.63" (16.0)
SK-978558	3.98" (101.0)	2.56" (65.0)	1.26" (32.0)	2.17" (55.0)	5/8" (15.9)						0.75" (19.0)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0050

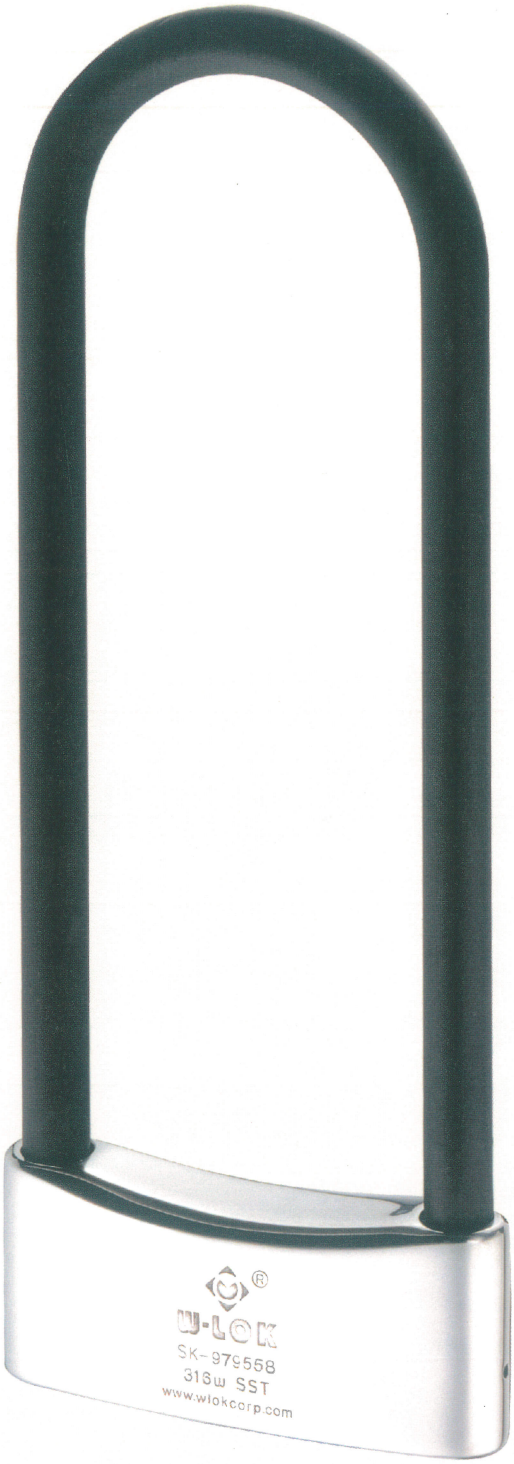

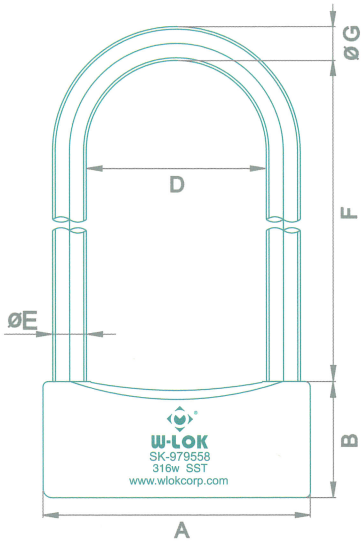

Stainless Steel ShackleLok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F					ØG
SK-979558	5.91" (150.0)	2.56" (65.0)	1.38" (35.0)	3.98" (101.0)	5/8" (15.9)	2.21" (56.0)	4.00" (101.6)	9.00" (228.6)	10.00" (254.0)	12.00" (304.8)	0.75" (19.0)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0050

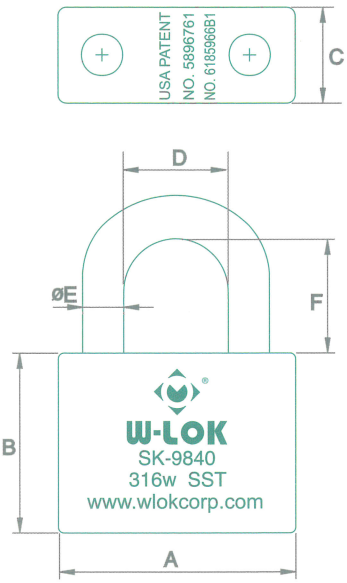

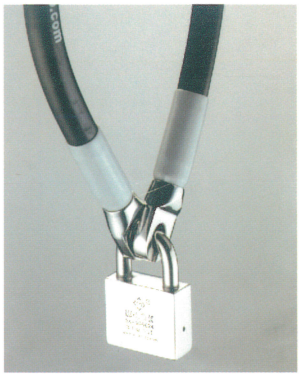



Stainless Steel Padlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							BALL BEARING DIAMETER
SK-9840	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.82" (20.7)	3/8" (9.5)	0.71" (18.0)	0.91" (23.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1 / 2" (12.7)
SK-9850	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5) 1/2" (12.7)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1 / 2" (12.7)
SK-9860	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.04" (26.3)	3/8" (9.5) 1/2" (12.7)	0.83" (21.0)	0.93" (23.6)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3/8" (9.5)
SK-9870	2.84" (72.0)	2.21" (56.0)	1.01" (25.6)	1.34" (34.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1/2" (12.7)

*OEM or special spec. & material as per your request.

W-LOK

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK
-0140

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

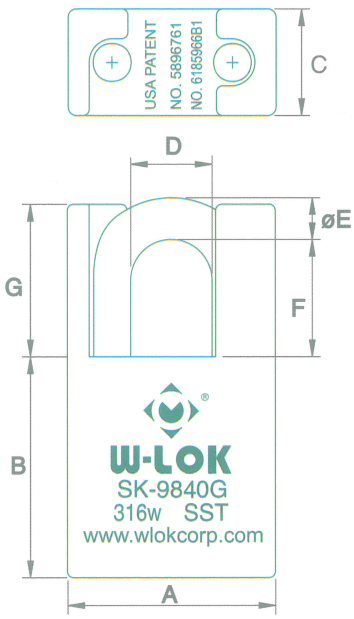





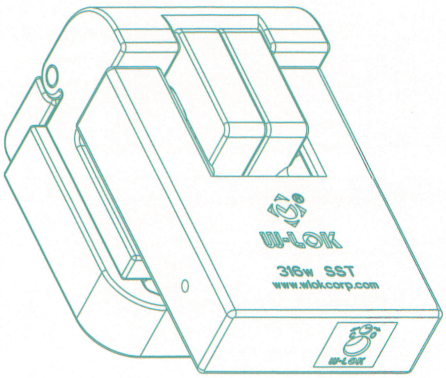

Stainless Steel Guarded Padlok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

MODEL NO.	A	B	C	D	ØE	F	G	BALL BEARING DIAMETER
SK-9840G	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.82" (20.7)	3/8" (9.5)	0.91" (23.0)	1.32" (33.6)	1 / 2" (12.7)
SK-9850G	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5) 1/2" (12.7)	1.02" (26.0)	1.44" (36.6)	1 / 2" (12.7)
SK-9860G	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.04" (26.3)	3/8" (9.5) 1/2" (12.7)	0.93" (23.6)	1.42" (36.0)	3/8" (9.5)
SK-9870G	2.84" (72.0)	2.21" (56.0)	1.01" (25.6)	1.34" (34.0)	1/2" (12.7)	1.50" (38.1)	1.89" (48.0)	1/2" (12.7)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

Stainless Steel Security Solutions

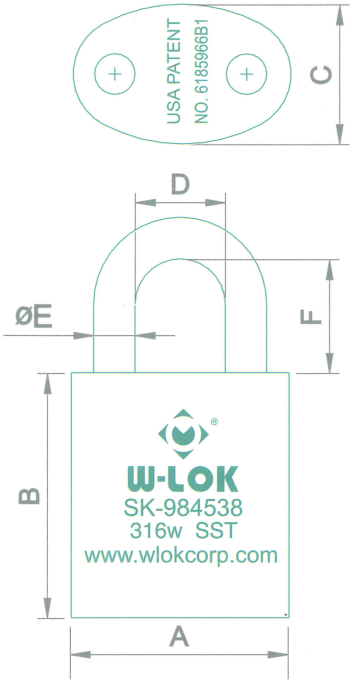

Stainless Steel Ovallok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							TYPE OF L STOP PIN
SK-984538	1.97" (50.0)	2.21" (56.0)	1.26" (32.0)	0.82" (20.7)	3/8" (9.5)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985538	2.17" (55.0)	2.21" (56.0)	1.26" (32.0)	0.99" (25.2)	3/8" (9.5)	0.71" (18.0)	1.10" (28.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	B
SK-985524				0.87" (22.0)	1/2" (12.7)								E
SK-986538	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H
SK-986524				1.13" (28.8)	1/2" (12.7)								F
SK-987524	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H

*OEM or special spec. & material as per your request.

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

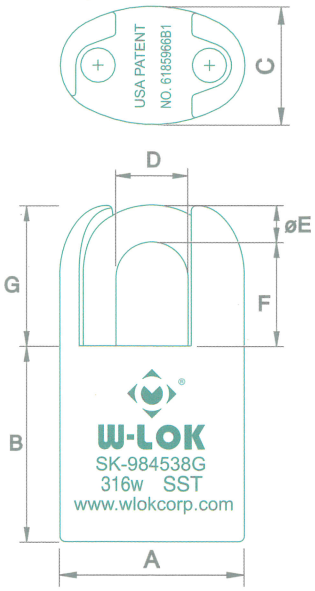



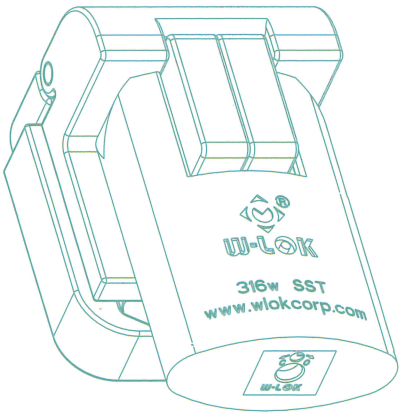

Stainless Steel Guarded Ovallok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-984538G	1.97" (50.0)	2.21" (56.0)	1.26" (32.0)	0.82" (20.7)	3/8" (9.5)	1.02" (26.0)	1.40" (35.5)	A
SK-985538G	2.17" (55.0)	2.21" (56.0)	1.26" (32.0)	0.99" (25.2)	3/8" (9.5)	1.10" (28.0)	1.60" (40.7)	B
SK-985524G				0.87" (22.0)	1/2" (12.7)			E
SK-986538G	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	H
SK-986524G				1.13" (28.8)	1/2" (12.7)			F
SK-987524G	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	H

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone : 886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

W-LOK

Stainless Steel Security Solutions

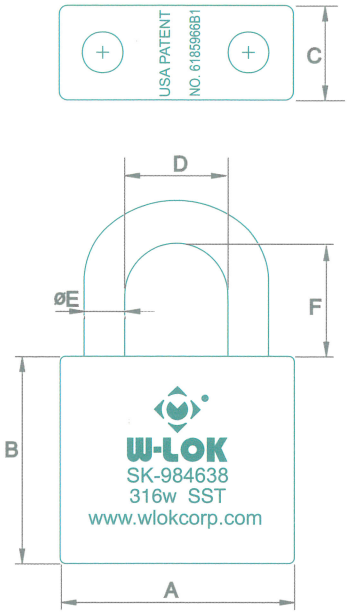





Stainless Steel Padlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents



W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							TYPE OF L STOP PIN
SK-984638	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.85" (21.7)	3/8" (9.5)	0.71" (18.0)	0.91" (23.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985638	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985624					1/2" (12.7)								
SK-986638	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H
SK-986624				1.13" (28.8)	1/2" (12.7)	0.83" (21.0)	0.93" (23.6)						F
SK-987624	2.83" (72.0)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

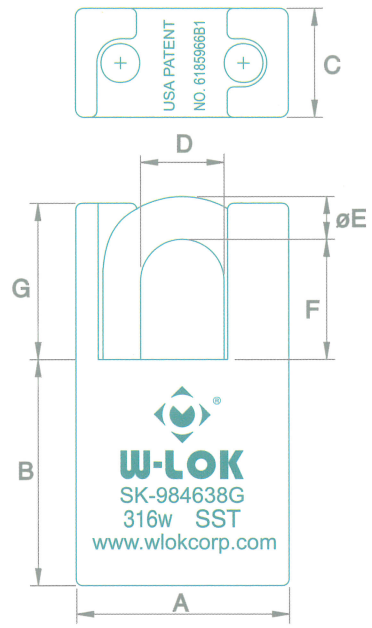





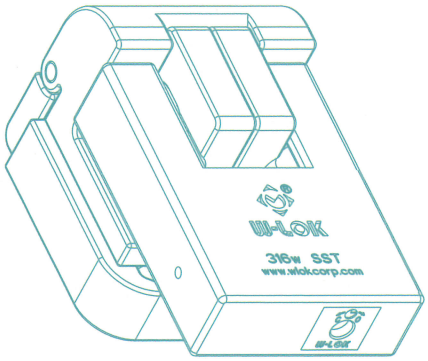

Stainless Steel Guarded Padlok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-984638G	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.85" (21.7)	3/8" (9.5)	0.91" (23.0)	1.32" (33.6)	A
SK-985638G	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5)	1.02" (26.0)	1.44" (36.6)	A
SK-985624G					1/2" (12.7)			
SK-986638G	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	H
SK-986624G				1.13" (28.8)	1/2" (12.7)	0.93" (23.6)	1.42" (36.0)	F
SK-987624G	2.83" (72.0)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	H

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0010

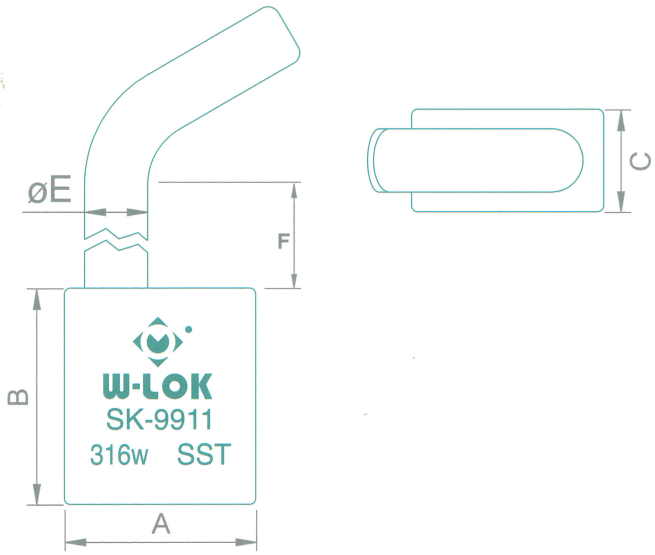

Stainless Steel Trailerlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	ØE	F
SK-9910	1.89" (48.0)	2.13" (54.0)	1.01" (25.6)	5/8" (15.9)	4.01" (101.9)
SK-9911	1.89" (48.0)	2.13" (54.0)	1.01" (25.6)	1/2" (12.7)	3.57" (90.7)

*OEM or special spec. & material as per your request.

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0100

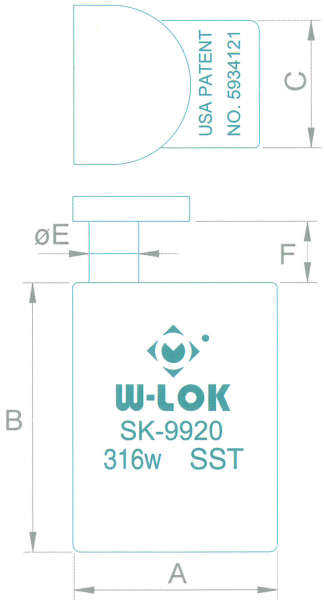

Stainless Steel Pinlok

- 100% stainless steel with brushed finish.
- Pin shackle has two locking positions.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

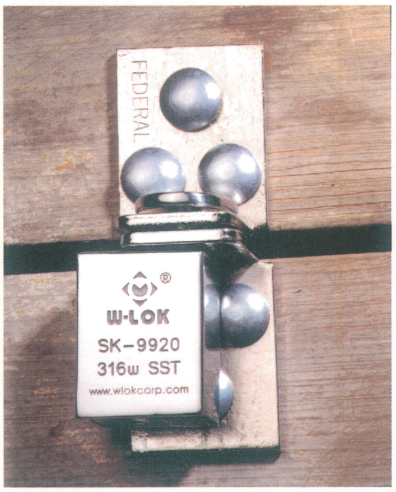

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	ØE	F
SK-9920	1.62" (41.1)	2.13" (54.0)	1.01" (25.6)	3/8" (10.0)	0.30" (7.5)
					0.48" (12.3)
SK-9921	1.72" (43.8)	2.13" (54.0)	1.01" (25.6)	1/2" (12.7)	0.30" (7.5)
					0.48" (12.3)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

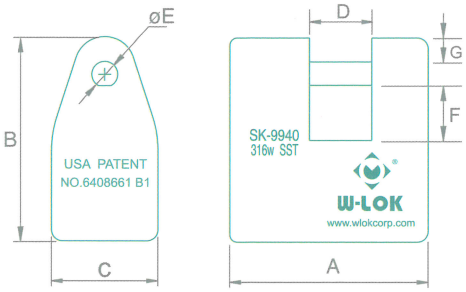

Stainless Steel Viselok

- 100% stainless steel with brushed finish.
- The lock body has rounded raised shoulders to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-99SA series) or 270-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G
SK-9940	2.13" (54.0)	2.19" (55.5)	1.14" (29.0)	0.67" (17.0)	1/4" (6.4)	0.61" (15.5)	0.26" (6.6)
SK-9941	2.13" (54.0)	2.19" (55.5)	1.14" (29.0)	0.59" (15.0)	3/8" (9.5)	0.52" (13.3)	0.25" (6.3)
SK-9942	2.13" (54.0)	2.36" (60.0)	1.14" (29.0)	0.59" (15.0)	1/2" (12.7)	0.61" (15.5)	0.21" (5.3)
SK-9943	2.13" (54.0)	2.36" (60.0)	1.14" (29.0)	0.59" (15.0)	3/8" (9.5)	0.61" (15.5)	0.34" (8.5)

*OEM or special spec. & material as per your request.

W-LOK

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

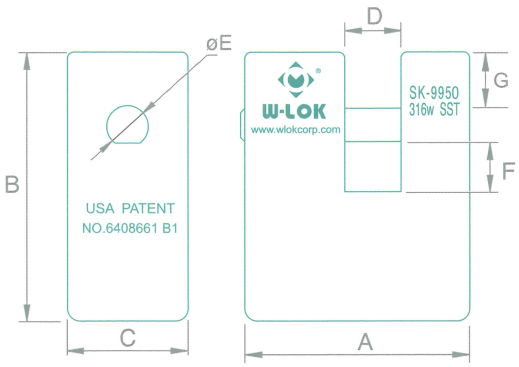

Stainless Steel Marslok

- 100% stainless steel with brushed finish.
- The lock body has raised shoulders to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-99SA series) or 270-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

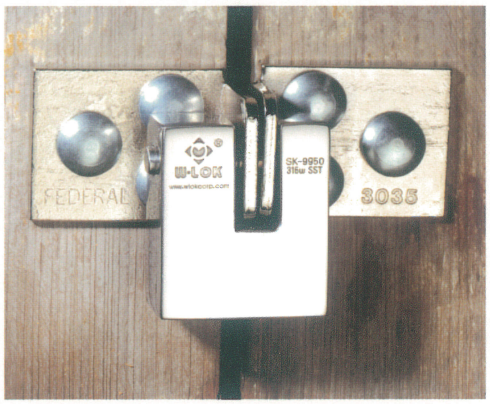

*Specifications are subject to change without notice.

UNIT: inch / (mm)

MODEL NO.	A	B	C	D	øE	F	G
SK-9950	2.13" (54.0)	2.42" (61.5)	1.14" (29.0)	0.51" (13.0)	3/8" (9.5)	0.59" (15.0)	0.35" (8.9)
SK-9951	2.13" (54.0)	2.42" (61.5)	1.14" (29.0)	0.51" (13.0)	3/8" (9.5)	0.67" (17.0)	0.27" (6.9)
SK-9952	2.13" (54.0)	2.42" (61.5)	1.14" (29.0)	0.51" (13.0)	1/2" (12.7)	0.59" (15.0)	0.22" (5.7)
SK-9953	2.13" (54.0)	2.62" (66.5)	1.14" (29.0)	0.51" (13.0)	3/8" (9.5)	0.59" (15.0)	0.55" (13.9)
SK-9954	2.13" (54.0)	2.62" (66.5)	1.14" (29.0)	0.51" (13.0)	1/2" (12.7)	0.59" (15.0)	0.42" (10.7)
SK-9955	2.24" (57.0)	2.68" (68.0)	1.14" (29.0)	0.87" (22.0)	3/8" (9.5)	0.75" (19.0)	0.37" (9.4)
SK-9956	2.24" (57.0)	2.68" (68.0)	1.14" (29.0)	0.87" (22.0)	1/2" (12.7)	0.75" (19.0)	0.24" (6.2)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

SK-9970-06

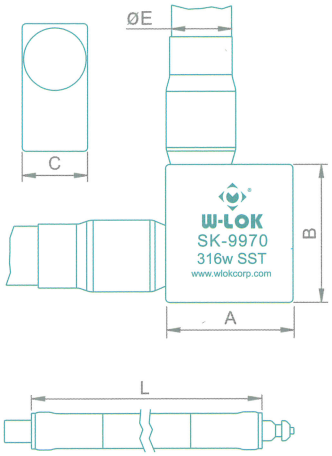



6x7x4+1x7x19
Braid Cable
Cross-Section

Stainless Steel Looplok

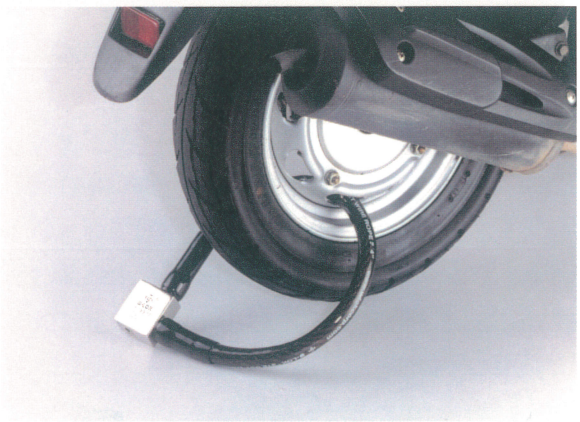

- 100% stainless steel with brushed finish.
- Cable is removable and interchangeable within the 9970 series.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- PE coating to protect against scratching.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	ØE	L
SK-9970-02	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	2' (609.6)
SK-9970-04	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	4' (1219.2)
SK-9970-06	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	6' (1828.8)
SK-9970-12	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	12' (3657.6)

*OEM or special spec. & material as per your request.

W-LOK

CUT RESISTANT
FORCE RESISTANT
WEATHER RESISTANT
PICK RESISTANT
CORROSION RESISTANT
LOW TEMP TESTED

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0060

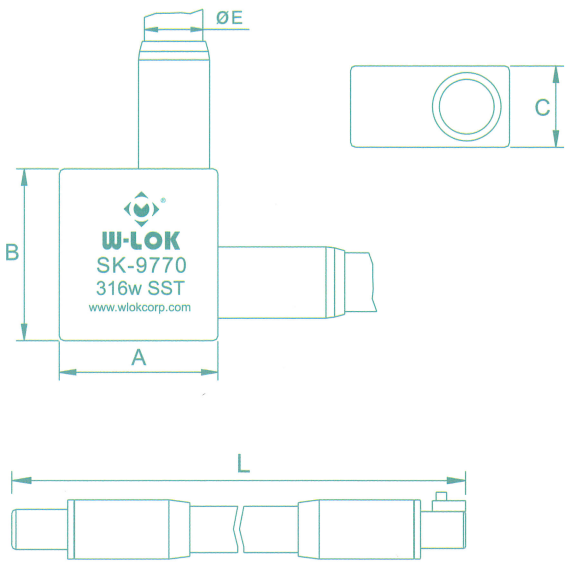

Stainless Steel Looplok

- 100% stainless steel with brushed finish.
- Cable is removable and interchangeable within the 9770 series, allowing the user to select the right length for each application.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Our stainless steel cable is clad with hardened stainless steel shells and encapsulated in a PE cover to protect against cutting and scratching.
- Lock Body dust cover included.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	ØE	L				
SK-9770	2.36" (60.0)	2.40" (61.0)	1.18" (30.0)	7/8" (22.0)	30" (762)	60" (1524)	90" (2286)	120" (3048)	150" (3810)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone : 886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0060

Stainless Steel Security Solutions

CB-02

CB-04

CB-06

Stainless Steel Cable

- 100% stainless steel with brushed finish.
- The SK-2023 VersaLok was specially designed for use with cable. However, many of the W-LOK products can be used to lock the cable ends together.
- The cable is a 6x7x4+1x7x19 braid of aircraft quality grade stainless steel.
- PE coating to protect against scratching.
- 300 metric tons of compression used to crimp fittings.

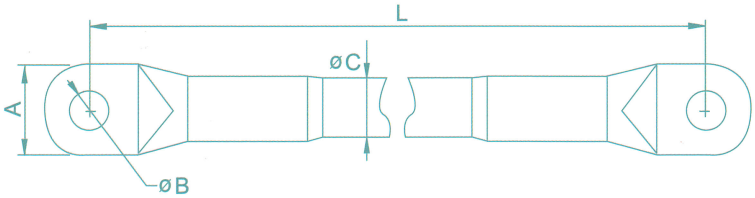

*Specifications are subject to change without notice.

UNIT: inch / (mm)



6x7x4+1x7x19
Braid Cable
Cross-Section

Model No.	A	ØB	ØC	L
CB-02	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	2" (609.6)
CB-04	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	4" (1219.2)
CB-06	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	6" (1828.8)
CB-12	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	12" (3657.6)

*OEM or special spec. & material as per your request.

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

Stainless Steel Security Solutions

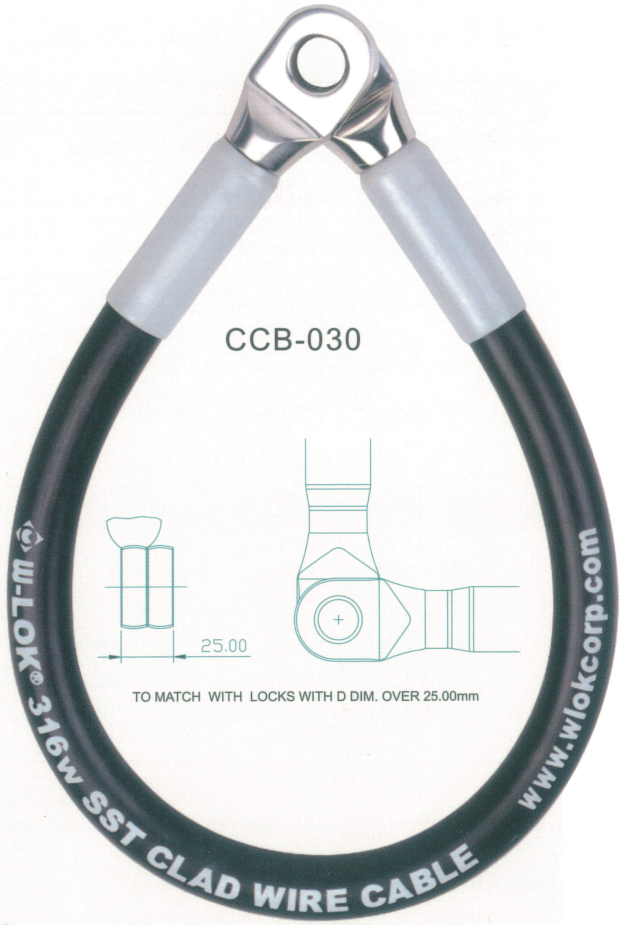

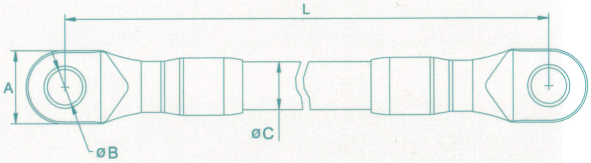

Stainless Steel Clad Cable

- 100% stainless steel with brushed finish.
- Our stainless steel cable is clad with hardened stainless steel shells and encapsulated in a PE cover to protect against cutting and scratching.
- 300 metric tons of compression used to crimp fittings.
- The W-LOK locks with chart dimension D (distance between shackles) greater than 0.98"(25.0) are recommended for use with the clad cable for maximum security, for example: SK-986524 & SK-976524, SK986538, SK-976538....etc.

*Specifications are subject to change without notice. UNIT: inch / (mm)

Model No.	A	ØB	ØC	L
CCB-030	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	30" (762.0)
CCB-060	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	60" (1524.0)
CCB-090	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	90" (2286.0)
CCB-120	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	120" (3048.0)
CCB-150	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	150" (3810.0)

*Contact us for details about co-branding.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

07-0070

Stainless Steel Security Solutions

SK-2021

SK-2024

SK-2022

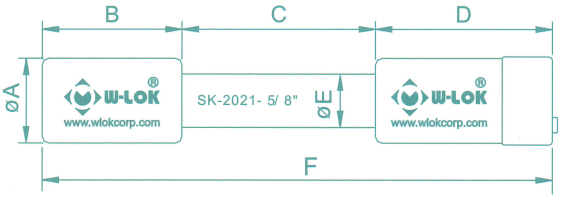

SK-2023

USA PATENT NO.6425272B1

Stainless Steel Versalok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-20A series) or 270-degree (for SK-20 series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Protected by worldwide patents.

DIN EN ISO 9001

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

LOW TEMP

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	ØA	B	C	D	ØE	F
SK-2021	1.00" (25.4)	1.65" (42.0)	2.28" (58.0)	2.09" (53.0)	5/8" (15.9)	6.02" (153.0)
SK-2022	1.00" (25.4)	1.65" (42.0)	2.28" (58.0)	2.09" (53.0)	1/2" (12.7)	6.02" (153.0)
SK-2023	1.00" (25.4)	1.65" (42.0)	1.00" (25.5)	2.09" (53.0)	5/8" (15.9)	4.74" (120.5)
SK-2024	1.00" (25.4)	1.65" (42.0)	0.52" (13.3)	2.09" (53.0)	1/2" (12.7)	4.26" (108.3)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone : 886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

0080

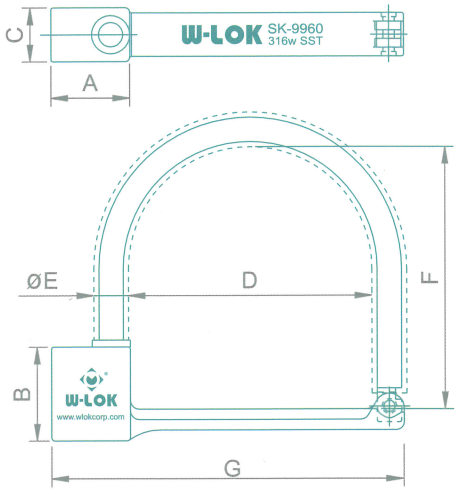

Stainless Steel Clamplok

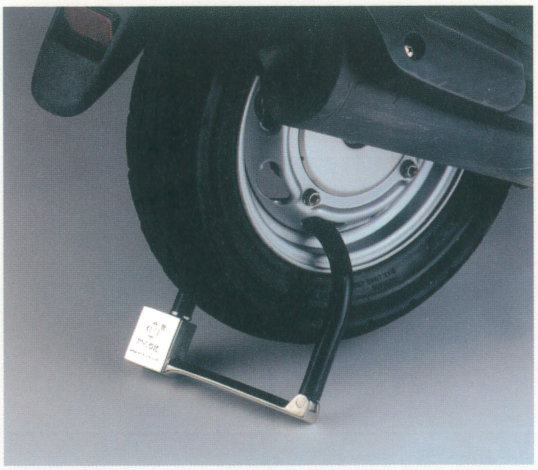

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA / 97SA series) or 225-degree (for SK-99S / 97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- PVC cover are available in black, blue, green, red and yellow.
- Protected by worldwide patents.

TÜV DIN EN ISO 9001

*Specifications are subject to change without notice.

UNIT: inch / (mm)

MODEL NO.	A	B	C	D	ØE	F	G
SK-9960	1.85" (47.0)	2.13" (54.0)	1.22" (31.0)	5.51" (140.0)	4/5" (20.0)	5.94" (150.8)	7.99" (202.9)
SK-9760	1.85" (47.0)	2.13" (54.0)	1.22" (31.0)	5.51" (140.0)	4/5" (20.0)	5.94" (150.8)	7.99" (202.9)

*OEM or special spec. & material as per your request.

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0080

Stainless Steel Security Solutions

SK-97(S)



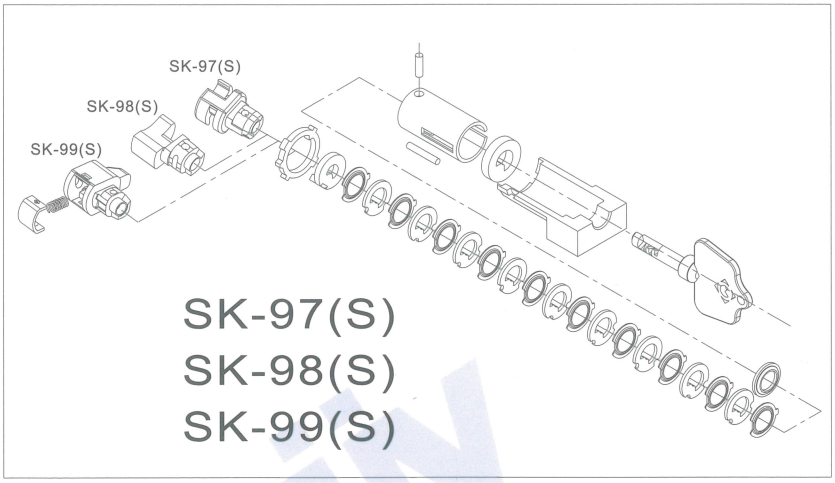



SK-98(S)



SK-99(S)



SK-20



Stainless Steel Cylinder

- 100% stainless steel with special heat treatment with natural SST color or zinc flake/chromate coating.
- Every cylinder has a unique key code with 270 degree operating radius.
- Each cylinder can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Key shank made of Nickel Silver Alloy NM6.
- Key duplication factory controlled by the serial number and password.
- Protected by worldwide patents.

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	E	F
SK-97(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.49" (12.9)	0.69" (17.5)
SK-98(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.45" (11.5)	0.65" (16.5)
SK-99(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.51" (13.0)	0.98" (25.0)
SK-20	1.00" (25.4)	1.00" (25.4)	2.09" (53.0)	N/A	N/A	N/A

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan



SK-97(S)A





SK-98(S)A





SK-99(S)A



SK-20A



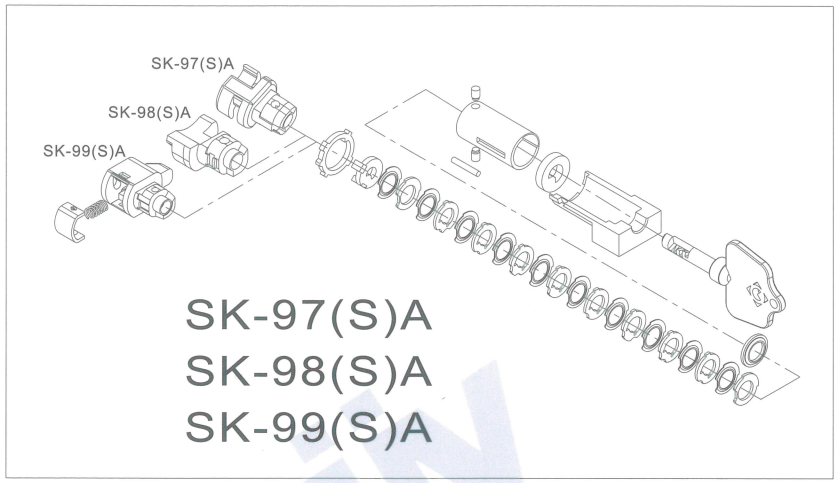

Stainless Steel A-Cylinder

- 100% stainless steel with special heat treatment with natural SST color or zinc flake/chromate coating.
- Every cylinder has a unique key code with 180 degree operating radius.
- Each cylinder can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Key shank made of Nickel Silver Alloy NM6.
- Key duplication factory controlled by the serial number and password.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	E	F
SK-97(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.49" (12.9)	0.69" (17.5)
SK-98(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.45" (11.5)	0.65" (16.5)
SK-99(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.51" (13.0)	0.98" (25.0)
SK-20A	1.00" (25.4)	1.00" (25.4)	2.09" (53.0)	N/A	N/A	N/A

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

Copyright, 2001, W-LOK Corp.
Printed In Taiwan

Stainless Steel Security Solutions

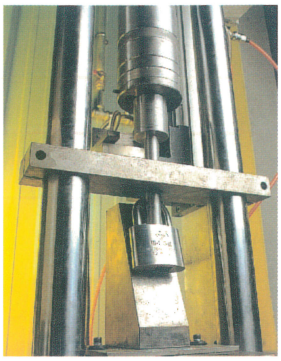

IMPACT RESISTANT TEST

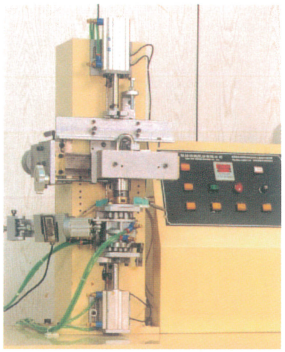

CYCLE TEST

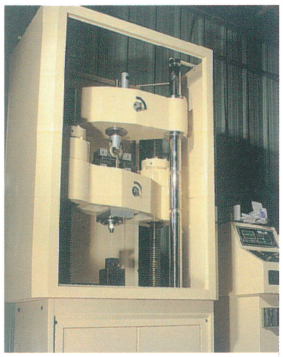

CUT RESISTANT TEST

HARDNESS TEST



SAW RESISTANT TEST



ENVIRONMENTAL TEST

SALT SPRAY TEST



DRILL RESISTANT TEST



TWIST RESISTANT TEST



PULL RESISTANT TEST



DRILL RESISTANT TEST

WET PROCESS

FREEZING TEST

Security Requirments as Per ASTM F883

Cycle Tests Required Values

Cycle Tests	Grades 1	2	3	4	5	6
Keyed Padlocks (10.1) (−1000)	1	10	25	50	75	100
Force to Insert Key Maximum (all Grades)	◄		12 N (3 lbf)			►
Force to Extract Key Maximum (all Grades)	◄		12 N (3 lbf)			►
Torque to Rotate Cylinder Plug Maximum, Newton Metres (ozf-in.)	0.17 (24)	0.17 (24)	0.13 (18)	0.13 (18)	0.08 (11)	0.08 (11)
Combination Padlocks (10.2) (−1000)	1	10	25	50	75	100

Required Values for Corrosion and Environmental Tests

	Grades 1	2	3	4	5	6
Option E−Corrosion Testing						
Salt Spray (11.1)						
Cumulative time (h)	120	144	168	192	216	240
Option G−Environmental Testing						
Dry contaminant testing 11.2.1)						
Grit size[A]	16	16	30	30	100	100
Cumulative time (h)	0.5	1	1.5	2	2.5	3
Weathering Testing (11.2.2)						
Salt spray (fog)						
Cumulative time (h)	96	192	288	384	480	576
UV light/condensed moisture condensation						
Cumulative time (h)	16	32	48	64	80	98
UV light						
Cumulative time (h)	32	64	96	128	160	192
Exposure totals						
Cumulative time (h)	144	288	422	576	720	864
Freeze Testing (11.2.3)						
Min. Temperature (°F)	N/A	N/A	N/A	+15	-15	-45

Forcing tests Required Values

Forcing Tests	Units	Grades 1 (F1)	2 (F2)	3 (F3)	4 (F4)	5 (F5)	6 (F6)
Tensile Force	newtons	1,000	2,500	5,000	9,000	20,000	40,000
	(lbf)	(225)	(560)	(1125)	(2000)	(4500)	(9000)
Shock test blows		5	5	5	5	5	5
Shock test weights	kilograms	1	2	3	4	5	6
	(lbs)	(2.2)	(4.4)	(6.6)	(8.8)	(11.0)	(13.2)
Shock test heights	Meters	1	1	1	1	1	1
	(in.)	(39.4)	(39.4)	(39.4)	(39.4)	(39.4)	(39.4)
Plug pull test	Newtons	1000	1500	2000	3000	6000	12000
	(lbf)	(225)	(337)	(450)	(675)	(1350)	(2700)
Plug torque test	Newton-meters	10	15	20	25	30	35
	(lbf·in.)	(89)	(133)	(177)	(221)	(266)	(310)
Shackle cutting force test	Newtons	4450	9000	13500	18000	31000	45000
	(lbf)	(1000)	(2000)	(3000)	(4000)	(7000)	(10000)

Surreptitious Entry Tests Required Values

Surreptitious Entry Tests	Grades 1 (S1)	2 (S2)	3 (S3)	4 (S4)	5 (S5)	6 (S6)
Picking or Manipulation (9.1), min	1/2	1	2	4	8	15
Impressioning or Decoding (9.2), min	0	0	2	4	8	15
Shackle Shimming Test (9.3), min	1/2	1	2	4	8	15
Drilling and Shimming (9.4), min	0	0	0	4	8	15
Rapping (9.5), min	0	0	2	4	8	15

W-LOK

CUT RESISTANT

FORCE RESISTANT

WEATHER RESISTANT

PICK RESISTANT

CORROSION RESISTANT

LOW TEMP TESTED

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone :886-4-2265-3669
FAX :886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

-0150

Stainless Steel Security Solutions

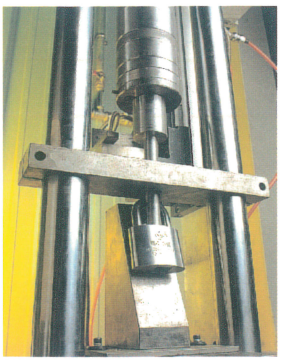

IMPACT RESISTANT TEST

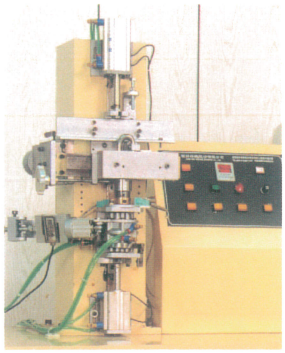

CYCLE TEST

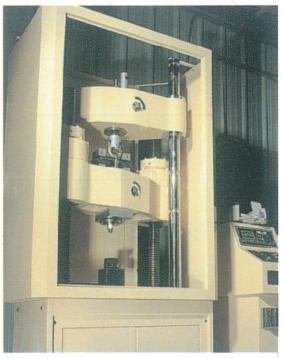

CUT RESISTANT TEST



HARDNESS TEST



SAW RESISTANT TEST



ENVIRONMENTAL TEST

SALT SPRAY TEST



DRILL RESISTANT TEST

Security Requirements as Per EN-12320

Requirement	EN12320 Grade	1	2	3	4	5	6	Unit
	Swedish Grade		1	2	3	4	5	
Minimum number of effective key differs	n	300	1000	2500	5000	10000	20000	-
Non-interpassing of keys with just one interval differ-torque on key	M1	1	1	1.5	1.5	1.5	1.5	Nm
Resistance to force on cylinder plug or locking mechanism	F1	-	-	4	5	10	15	kN
Resistance to torque on cylinder plug or locking mechanism	M2	-	2.5	5	15	20	30	Nm
Resistance to pulling of shackle and staple	F2	3	5	15	30	70	100	kN
Resistance to twisting of shackle and staple	M3	40	100	200	450	1200	2500	Nm
Resistance to cutting of shackle and staple	F3	5	15	25	35	70	100	kN
Resistance to impact on padlock body, shackle and staple at low temperature	T m h	- - -	- - -	-20 1250 800	-20 3050 1000	-40 6530 1400	-40 7150 1500	℃ g mm
Resistance to drilling of padlock body, shackle and staple	t	-	-	-	2	4	8	min
Resistance to sawing of padlock body, shackle and staple	t	-	-	-	2	4	8	min

NOTE Classification is in six grades where grade 1 had the lowest requirement.



PULL RESISTANT TEST



TWIST RESISTANT TEST



DRILL RESISTANT TEST

WET PROCESS

FREEZING TEST

W-LOK

W-LOK CORP.
861 Productions Place,
Holland, MI 49423 USA
Phone:616-355-4015
FAX:616-355-4295
www.wlokcorp.com
E-Mail:office@wlokcorp.com
Toll Free:877-355-WLOK

W-LOK Europe B.V.
P.O.BOX 43,
1950 AA Velsen-Noord,
The Netherlands
Phone : 31-(0)251-291-391 or 394
FAX : 31-(0)251-291-393
Mobile:31-(0)6-506-909-46
E-Mail:office-eu@wlokcorp.com

W-LOK CORP.
Far East Branch
8F,428 Wu Chuang S. Rd.
Taichung, Taiwan
Phone : 886-4-2265-3669
FAX : 886-4-2265-9431
www.wlokcorp.com
E-Mail:office-tw@wlokcorp.com

© Copyright, 2001, W-LOK Corp.
Printed In Taiwan

7-0150