


Stainless Steel Security Solutions



100% STAINLESS STEEL HASP





Stainless Steel Security Solutions



Stainless Steel Hasp


- 100% stainless steel with brushed finish.
- Specially designed to fit all **W-LOK** locks.
- For maximum security, the user is advised to weld the nuts to the exposed threads of the 10M bolts after securely tightening the nuts. Alternatively, the user could employ any other method to deform the exposed threads after securely tightening the nuts to prevent removal of the nuts with conventional hand tool.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.:	A	B	C	D	F	S
SK-60L24	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.49" (12.5)	0.59" (15.0)	0.00" (0.0)
SK-60R24				0.65" (16.5)	0.16" (4.0)	
SK-70L38	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.81" (20.5)	0.41" (10.3)	0.00" (0.0)
SK-70R38				1.19" (30.2)	0.38" (9.60)	
SK-70L24	2.76" (70.0)	2.50" (63.50)	3.35" (85.0)	0.81" (20.5)	0.53" (13.5)	0.00" (0.0)
SK-70R24				1.25" (31.7)	0.44" (11.2)	
SK-75L24	2.95" (75.0)	2.50" (63.5)	3.35" (85.0)	0.97" (24.7)	0.53" (13.5)	0.00" (0.0)
SK-75R24				1.25" (31.7)	0.29" (7.0)	
SK-100L24	3.94" (100.0)	2.50" (63.5)	3.50" (89.0)	0.99" (25.2)	0.53" (13.5)	0.00" (0.0)
SK-100R24				1.21" (30.6)	0.21" (5.4)	

*Contact us for details about co-branding.



SK-60L24-SK-100L24





CERTIFICATE

**The TÜV CERT Certification Body
of TÜV Anlagentechnik GmbH**

TÜV Rheinland/Berlin-Brandenburg Group of Companies

certifies in accordance with TÜV CERT procedures that



Waterson Corp.

Office: 8F, No. 428, Wu Chuan S. Road, Taichung City 402, Taiwan, R.O.C

Factory: No. 459, Ta Li Road, Ta Li City, Taichung Hsien 412, Taiwan, R.O.C.

has established and applies a quality system for

Design/Development, Manufacturing and Sales of:

- A. Metal Investment Casting Parts for Hydraulic System Cam Lock Safe Quick Couplers and Adapters "SAFLOK", Clamps and Ferrules, Butterfly Valves, Ball Valves "WAT", Lock Cylinders and Locks "W-LOK"
- B. Parts, Components and Accessories for Office Furniture

An audit was performed, Report No. **79107**

Proof has been furnished that the requirements according to

DIN EN ISO 9001:2000

are fulfilled.

The certificate is valid until **2004 March**

Certificate Registration No. **09 100 79107**





ZERTIFIKAT

**Die TÜV CERT-Zertifizierungsstelle
der TÜV Anlagentechnik GmbH**

Unternehmensgruppe TÜV Rheinland/Berlin-Brandenburg

bescheinigt gemäß TÜV CERT-Verfahren, daß das Unternehmen



Waterson Corp.

Office: 8F, No. 428, Wu Chuan S. Road, Taichung City 402, Taiwan, R.O.C.
Factory: No. 459, Ta Li Road, Ta Li City, Taichung Hsien 412, Taiwan, R.O.C.

für den Geltungsbereich

Design/Entwicklung, Herstellung und Verkauf von Feinguß-Metallprodukten für:

- A. Nockenschlüssige sichere Schnellkopplungen und Verbindungsstücke "SAFLOK" für Hydraulik-systeme Schraubzwingen und Rohrzwingen, Schmetterlingsventile und Kugelventile "WAT", Schloßzylinder und Schlösser "W-LOK"
- B. Bauteilen, Einzelteilen und Zubehör für Büromöbeln

ein Qualitätsmanagementsystem eingeführt hat und anwendet.

Durch ein Audit, Bericht Nr. **79107**

wurde der Nachweis erbracht, daß die Forderungen der

DIN EN ISO 9001:2000

erfüllt sind.

Dieses Zertifikat ist gültig bis **2004 März**

Zertifikat-Registrier-Nr. **09 100 79107**



TÜV Rheinland/
Berlin-Brandenburg





Stainless Steel Disclok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle makes the Disclok suitable for use as a motorcycle brake lock.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Lock body dust cover included.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	OE	F				G			
SK-976524HG	2.60" (66.0)	2.34" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3.3" (83.8)	4.3" (109.2)	5.3" (134.6)	6.3" (160.0)
SK-977524HG	2.64" (67.0)	2.34" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3.3" (83.8)	4.3" (109.2)	5.3" (134.6)	6.3" (160.0)

*Contact us for details about co-branding.



Stainless Steel Disclok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle makes the Disclok suitable for use as a motorcycle brake lock.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Lock body dust cover included.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)



Model No.	A	B	C	D	ØE	F	G
SK-976538HG	2.60" (66.0)	2.24" (57.5)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	3.0" (76.2) 4.0" (102.0) 5.0" (127.0) 6.0" (152.4) 3.3" (83.8) 4.3" (109.2) 5.3" (134.6) 6.3" (160.0)	

*Contact us for details about co-branding.



W-LOK



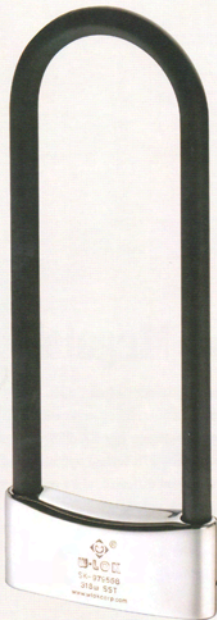

Stainless Steel Shackle Lok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.


*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F				ØG
SK-979558	5.91" (150.0)	2.56" (65.0)	1.58" (35.0)	3.98" (101.0)	5/8" (15.8)	2.21" (56.0)	4.00" (101.6)	9.00" (228.6)	10.00" (254.0)	0.75" (19.0)

*OEM or special spec. & material as per your request.





Stainless Steel Megalok


- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F					ØG
SK-978524	3.98" (101.0)	2.56" (65.0)	1.26" (32.0)	2.28" (58.0)	1.02" (26.0)	2.21" (56.0)	4.00" (101.6)	9.00" (228.6)	10.00" (254.0)	12.00" (304.8)	0.63" (16.0)
SK-978558	3.98" (101.0)	2.56" (65.0)	1.26" (32.0)	2.17" (55.0)	0.98" (25.0)						0.75" (19.0)

*OEM or special spec. & material as per your request.



Stainless Steel Security Solutions



Stainless Steel Oval Maxilok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	OE	F							
SK-976524H	2.60" (66.0)	2.28" (58.0)	1.28" (32.0)	1.00" (25.4)	1.00" (25.4)	0.83" (21.0)	1.0" (25.4)	1.28" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)
SK-977524H	2.84" (72.0)	2.28" (58.0)	1.28" (32.0)	1.28" (32.0)	1.00" (25.4)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	

*Contact us for details about co-branding.





Stainless Steel Oval Maxilok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice

UNIT: Inch / (mm)

Model No.	A	B	C	D	OE	F							
SK-976538H	2.60" (66.0)	2.28" (58.0)	1.28" (32.5)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)

*Contact us for details about co-branding.



Stainless Steel Pinlok

- 100% stainless steel with brushed finish.
- Pin shackle has two locking positions.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	ØE	F
SK-9920	1.62" (41.1)	2.13" (54.0)	1.01" (25.6)	3/8" (10.0)	0.30" (7.5)
					0.48" (12.3)
SK-9921	1.72" (43.8)	2.13" (54.0)	1.01" (25.6)	1/2" (12.7)	0.30" (7.5)
					0.48" (12.3)

*OEM or special spec. & material as per your request.



Stainless Steel TrailerLok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.


UNIT: inch / (mm)

Model No.	A	B	C	ØE	F
SK-9910	1.89" (48.0)	2.13" (54.0)	1.01" (25.6)	5/8" (15.9)	4.01" (101.9)
SK-9911	1.89" (48.0)	2.13" (54.0)	1.01" (25.6)	1/2" (12.7)	3.57" (90.7)

*OEM or special spec. & material as per your request.



Stainless Steel Security Solutions



Stainless Steel Looplok

- 100% stainless steel with brushed finish.
- Cable is removable and interchangeable within the 9770 series, allowing the user to select the right length for each application.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Our stainless steel cable is clad with hardened stainless steel shells and encapsulated in a PE cover to protect against cutting and scratching.
- Lock Body dust cover included.
- Protected by worldwide patents.



*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	OE	L				
SK-9770	2.38" (60.0)	2.45" (61.0)	1.18" (30.0)	7/8" (22.0)	30" (762)	60" (1524)	90" (2286)	120" (3048)	150" (3810)

*Contact us for details about co-branding.



SK-9970-06



Stainless Steel Looplok

- 100% stainless steel with brushed finish.
- Cable is removable and interchangeable within the 9970 series.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA series) or 225-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- PE coating to protect against scratching.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	ØE	L
SK-9970-02	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	2" (609.6)
SK-9970-04	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	4" (1219.2)
SK-9970-06	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	6" (1828.8)
SK-9970-12	1.97" (50.0)	2.13" (54.0)	1.01" (25.6)	4/5" (20.0)	12" (3657.6)

*OEM or special spec. & material as per your request.





Stainless Steel Clad Cable

- 100% stainless steel with brushed finish.
- Our stainless steel cable is clad with hardened stainless steel shells and encapsulated in a PE cover to protect against cutting and scrapping.
- 300 metric tons of compression used to crimp fittings.
- The **W-LOK** locks with chart dimension D (distance between shackles) greater than 0.98" (25.0) are recommended for use with the clad cable for maximum security, for example: SK-986524 & SK-976524; SK986538, SK-976538....etc.



*Specifications are subject to change without notice. UNIT: inch / (mm)

Model No.	A	ØB	ØC	L
CCB-030	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	30" (762.0)
CCB-060	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	60" (1524.0)
CCB-090	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	90" (2286.0)
CCB-120	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	120" (3048.0)
CCB-150	1.56" (39.5)	0.77" (19.5)	7/8" (22.0)	150" (3810.0)

*Contact us for details about co-branding.



CB-02




CB-04



CB-06

Stainless Steel Cable

- 100% stainless steel with brushed finish.
- The SK-2023 VersaLok was specially designed for use with cable. However, many of the **W-LOK** products can be used to lock the cable ends together.
- The cable is a 6x7x4+1x7x19 braid of aircraft quality grade stainless steel.
- PE coating to protect against scratching.
- 300 metric tons of compression used to crimp fittings.



*Specifications are subject to change without notice.

UNIT: inch / (mm)




6x7x4+1x7x19
Braid Cable
Cross-Section

Model No.	A	ØB	ØC	L
CB-02	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	2" (609.6)
CB-04	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	4" (1219.2)
CB-06	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	6" (1828.8)
CB-12	1.56" (39.5)	0.65" (16.5)	4/5" (20.0)	12" (3657.6)

*OEM or special spec. & material as per your request.





Stainless Steel Security Solutions



Stainless Steel Guarded Ovallok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice.

UNIT: Inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-976538G	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	A
SK-976524G	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	1.26" (32.0)	1.65" (42.0)	A
SK-977524G	2.84" (72.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	A

*Contact us for details about co-branding.





Stainless Steel Ovallok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents




*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F								TYPE OF L STOP-PIN
SK-976538	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	3.9" (9.5)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-976524	2.60" (66.0)	2.28" (58.0)	1.26" (32.0)	1.20" (30.4)	1.02" (26.0)	0.83" (21.0)	1.0" (25.4)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-977524	2.84" (72.0)	2.28" (58.0)	1.26" (32.0)	1.26" (32.0)	1.02" (26.0)	0.83" (21.0)	1.0" (25.4)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A

*Contact us for details about co-branding.



Stainless Steel Clamplok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 135-degree (for SK-99SA / 97SA series) or 225-degree (for SK-99S / 97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- PVC cover are available in black, blue, green, red and yellow.
- Protected by worldwide patents.




*Specifications are subject to change without notice.

UNIT: inch / (mm)

MODEL NO.	A	B	C	D	ØE	F	G
SK-9960	1.85" (47.0)	2.13" (54.0)	1.22" (31.0)	5.51" (140.0)	4/5" (20.0)	5.94" (150.8)	7.99" (202.9)
SK-9760	1.85" (47.0)	2.13" (54.0)	1.22" (31.0)	5.51" (140.0)	4/5" (20.0)	5.94" (150.8)	7.99" (202.9)

*OEM or special spec. & material as per your request.



USA PATENT NO.6425272B1

Stainless Steel Versalok


- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-20A series) or 270-degree (for SK-20 series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.


UNIT: inch / (mm)

Model No.	ØA	B	C	D	ØE	F
SK-2021	1.00" (25.4)	1.65" (42.0)	2.28" (58.0)	2.09" (53.0)	5/8" (15.9)	6.02" (153.0)
SK-2022	1.00" (25.4)	1.65" (42.0)	2.28" (58.0)	2.09" (53.0)	1/2" (12.7)	6.02" (153.0)
SK-2023	1.00" (25.4)	1.65" (42.0)	1.00" (25.5)	2.09" (53.0)	5/8" (15.9)	4.74" (120.5)
SK-2024	1.00" (25.4)	1.65" (42.0)	0.52" (13.3)	2.09" (53.0)	1/2" (12.7)	4.26" (108.3)

*OEM or special spec. & material as per your request.



Stainless Steel Security Solutions



Stainless Steel Guarded Ovallok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 720-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G	TYPE OF L STOP PIN
SK-984538G	1.97" (50.0)	2.21" (56.0)	1.26" (32.0)	0.82" (20.7)	3/8" (9.5)	1.02" (26.0)	1.40" (35.5)	A
SK-985538G	2.17" (55.0)	2.21" (56.0)	1.26" (32.0)	0.99" (25.2)	3/8" (9.5)	1.10" (28.0)	1.60" (40.7)	B
SK-985524G				0.84" (22.0)	1/2" (12.7)			E
SK-986538G	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	H
SK-986524G				1.13" (28.8)	1/2" (12.7)			F
SK-987524G	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	H


*OEM or special spec. & material as per your request.





Stainless Steel Ovallok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents




*Specifications are subject to change without notice.

UNIT: inch / (mm)

Specifications are subject to change without notice.													
Model No.	A	B	C	D	ØE	F						TYPE OF L STOP PIN	
SK-984538	1.97" (50.0)	2.21" (56.0)	1.26" (32.0)	0.82" (20.7)	3/8" (9.5)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985538				0.99" (25.2)	3/8" (9.5)	0.71" (18.0)	1.10" (28.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	B
SK-985524	2.17" (55.0)	2.21" (56.0)	1.26" (32.0)	0.87" (22.0)	1/2" (12.7)								E
SK-986538				1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H
SK-986524	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.13" (28.8)	1/2" (12.7)								F
SK-987524	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H

*OEM or special spec. & material as per your request.



Stainless Steel Security Solutions



Stainless Steel Guarded Maxilok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G
SK-976624HG	2.60" (66.0)	2.34" (57.0)	1.26" (30.4)	1.20" (30.4)	1/2" (12.7)	1.28" (32.0)	1.65" (42.0)
SK-977624HG	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.38" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)

*Contact us for details about co-branding.





Stainless Steel Maxilok

- 100% stainless steel with brushed finish.
- Fully removable shackle for maximum convenience.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F
SK-976624H	2.90" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1.02" (25.9)	1.0" (25.4)
SK-977624H	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1.02" (25.9)	1.0" (25.4)

*Contact us for details about co-branding.


IMPACT RESISTANT TEST

CYCLE TEST

CUT RESISTANT TEST

HARDNESS TEST

SAW RESISTANT TEST

ENVIRONMENTAL TEST

SALT SPRAY TEST

HARDNESS TEST

Security Requirements as Per EN-12320

Requirement	EN12320 Grade	1 2 3 4 5 6						Unit
		Swedish Grade	1	2	3	4	5	
Minimum number of effective key differs	n	300	1000	2500	5000	10000	20000	-
Non-interpassing of keys with just one interval differ - tongue on key	M1	1	1	1.5	1.5	1.5	1.5	Nm
Resistance to force on cylinder plug or locking mechanism	F1	-	-	4	5	10	15	kN
Resistance to torque on cylinder plug or locking mechanism	M2	-	2.5	5	15	20	30	Nm
Resistance to pulling of shackle and staple	F2	3	5	15	30	70	100	kN
Resistance to twisting of shackle and staple	M3	40	100	200	450	1200	2500	Nm
Resistance to cutting of shackle and staple	F3	5	15	25	35	70	100	kN
Resistance to impact on padlock body, shackle and staple at low temperature	T	-	-	-20	-20	-40	-40	°C
Resistance to drilling of padlock body, shackle and staple	m	-	-	1250	3050	6530	7150	g mm
Resistance to sawing of padlock body, shackle and staple	h	-	-	800	1000	1400	1500	min
Resistance to drilling of padlock body, shackle and staple	i	-	-	-	2	4	8	min
Resistance to sawing of padlock body, shackle and staple	j	-	-	-	2	4	8	min

NOTE: Classification is in six grades where grade 1 had the lowest requirement.


DRILL RESISTANT TEST


PULL RESISTANT TEST

WET PROCESS

TWIST RESISTANT TEST

FREEZING TEST

DRILL RESISTANT TEST


IMPACT RESISTANT TEST

CYCLE TEST

CUT RESISTANT TEST

HARDNESS TEST

SAW RESISTANT TEST

ENVIRONMENTAL TEST

SALT SPRAY TEST

DRILL RESISTANT TEST

TWIST RESISTANT TEST

PULL RESISTANT TEST

DRILL RESISTANT TEST

Security Requirements as Per ASTM F883

Cycle Tests Required Values

Cycle Type	1	2	3	4	5	6
Impact Resistance (ASTM F883)	1	100	25	50	50	100
Force to Break (ASTM F883)	1	100	25	50	50	100
Force to Break (ASTM F883)	1	100	25	50	50	100
Force to Break (ASTM F883)	1	100	25	50	50	100
Force to Break (ASTM F883)	1	100	25	50	50	100
Force to Break (ASTM F883)	1	100	25	50	50	100

Required Values for Corrosion and Environmental Tests

Test	1	2	3	4	5	6
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100
Corrosion Resistance (ASTM F883)	100	100	100	100	100	100

Forcing Tests Required Values



Forcing Test	1	2	3	4	5	6
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000
Forcing Force (ASTM F883)	1,000	2,000	3,000	4,000	5,000	6,000

Surveillance Entry Tests Required Values

Surveillance Entry Test	1	2	3	4	5	6
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100
Surveillance Entry Test (ASTM F883)	1	100	25	50	50	100


WET PROCESS

FREEZING TEST



Stainless Steel Guarded Padlock


- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	OE	F	G	TYPE OF L STOP PIN
SK-976624G	2.60" (66.0)	2.24" (57.0)	1.26" (32.0)	1.20" (30.4)	1/2" (12.7)	1.26" (32.0)	1.65" (42.0)	A
SK-977624G	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	A

*Contact us for details about co-branding.



Stainless Steel Padlok






- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-97SA series) or 270-degree (for SK-97S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	TYPE OF L/STOP PIN
SK-976624	2.90" (66.0)	2.24" (57.0)	1.26" (32.0)	1.30" (33.0)	1/2" (12.7)	0.83" (21.0) 1.6" (25.4) 1.26" (32.0) 2.0" (50.8) 3.0" (76.2) 4.0" (102.0) 5.0" (127.0) 6.0" (152.4)	A
SK-977624	2.84" (72.0)	2.24" (57.0)	1.26" (32.0)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0) 1.6" (25.4) 1.50" (38.1) 2.0" (50.8) 3.0" (76.2) 4.0" (102.0) 5.0" (127.0) 6.0" (152.4)	A

*Contact us for details about co-branding.


SK-97(S)A

SK-98(S)A

SK-99(S)A

SK-20A

SK-97(S)A
SK-98(S)A
SK-99(S)A






Stainless Steel A-Cylinder

- 100% stainless steel with special heat treatment with natural SST color or zinc flake/chromate coating.
- Every cylinder has a unique key code with 180 degree operating radius.
- Each cylinder can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Key shank made of Nickel Silver Alloy NM6.
- Key duplication factory controlled by the serial number and password.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	E	F
SK-97(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.49" (12.9)	0.69" (17.5)
SK-98(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.45" (11.5)	0.65" (16.5)
SK-99(S)A	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.51" (13.0)	0.98" (25.0)
SK-20A	1.00" (25.4)	1.00" (25.4)	2.09" (53.0)	N/A	N/A	N/A

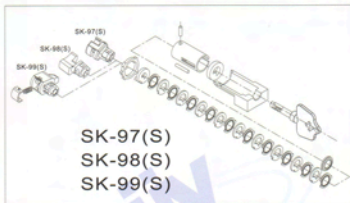
SK-97(S)

SK-98(S)

SK-99(S)

SK-20

SK-97(S)
SK-98(S)
SK-99(S)

Stainless Steel Cylinder


- 100% stainless steel with special heat treatment with natural SST color or zinc flake/chromate coating.
- Every cylinder has a unique key code with 270 degree operating radius.
- Each cylinder can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Key shank made of Nickel Silver Alloy NM6.
- Key duplication factory controlled by the serial number and password.
- Protected by worldwide patents.

*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	E	F
SK-97(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.49" (12.9)	0.69" (17.5)
SK-98(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.45" (11.5)	0.65" (16.5)
SK-99(S)	0.83" (21.0)	0.75" (19.0)	0.52" (13.2)	1.39" (35.4)	0.51" (13.0)	0.98" (25.0)
SK-20	1.00" (25.4)	1.00" (25.4)	2.09" (53.0)	N/A	N/A	N/A





Stainless Steel Marslok

- 100% stainless steel with brushed finish.
- The lock body has raised shoulders to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-99SA series) or 270-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.



*Specifications are subject to change without notice.

UNIT: inch / (mm)

MODEL NO.	A	B	C	D	øE	F	G
SK-9950	2 13" (54.0)	2 42" (61.5)	1 14" (29.0)	0 51" (13.0)	3/8" (9.5)	0 59" (15.0)	0 35" (8.9)
SK-9951	2 13" (54.0)	2 42" (61.5)	1 14" (29.0)	0 51" (13.0)	3/8" (9.5)	0 60" (15.2)	0 27" (6.9)
SK-9952	2 13" (54.0)	2 42" (61.5)	1 14" (29.0)	0 51" (13.0)	1/2" (12.7)	0 59" (15.0)	0 22" (5.7)
SK-9953	2 13" (54.0)	2 62" (66.5)	1 14" (29.0)	0 51" (13.0)	3/8" (9.5)	0 59" (15.0)	0 55" (13.9)
SK-9954	2 13" (54.0)	2 62" (66.5)	1 14" (29.0)	0 51" (13.0)	1/2" (12.7)	0 59" (15.0)	0 42" (10.7)
SK-9955	2 24" (57.0)	2 69" (68.0)	1 14" (29.0)	0 87" (22.0)	3/8" (9.5)	0 75" (19.0)	0 37" (9.4)
SK-9956	2 24" (57.0)	2 69" (68.0)	1 14" (29.0)	0 87" (22.0)	1/2" (12.7)	0 75" (19.0)	0 24" (6.2)

*OEM or special spec. & material as per your request.



Stainless Steel Viselok

- 100% stainless steel with brushed finish.
- The lock body has rounded raised shoulders to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-99SA series) or 270-degree (for SK-99S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.


UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F	G
SK-9940	2.13" (54.0)	2.19" (55.5)	1.14" (29.0)	0.67" (17.0)	1/4" (6.4)	0.61" (15.5)	0.26" (6.6)
SK-9941	2.13" (54.0)	2.19" (55.5)	1.14" (29.0)	0.59" (15.0)	3/8" (9.5)	0.52" (13.3)	0.25" (6.3)
SK-9942	2.13" (54.0)	2.36" (60.0)	1.14" (29.0)	0.59" (15.0)	1/2" (12.7)	0.61" (15.5)	0.21" (5.3)
SK-9943	2.13" (54.0)	2.36" (60.0)	1.14" (29.0)	0.59" (15.0)	3/8" (9.5)	0.61" (15.5)	0.34" (8.5)

*OEM or special spec. & material as per your request.




Stainless Steel Security Solutions



Stainless Steel Guarded Padlock

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.

UNIT: Inch / (mm)

MODEL NO.	A	B	C	D	ØE	F	G	BALL BEARING DIAMETER
SK-9840G	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.82" (20.7)	3/8" (9.5)	0.91" (23.0)	1.32" (33.6)	1/2" (12.7)
SK-9850G	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5) 1/2" (12.7)	1.02" (26.0)	1.44" (36.6)	1/2" (12.7)
SK-9860G	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.04" (26.3)	3/8" (9.5) 1/2" (12.7)	0.93" (23.6)	1.42" (36.0)	3/8" (9.5)
SK-9870G	2.84" (72.0)	2.21" (56.0)	1.01" (25.6)	1.34" (34.0)	1/2" (12.7)	1.50" (38.1)	1.89" (48.0)	1/2" (12.7)

*OEM or special spec. & material as per your request.





Stainless Steel Padlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents




*Specifications are subject to change without notice


UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							BALL BEARING DIAMETER
SK-9840	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.82" (20.7)	3/8" (9.5)	0.71" (18.0)	0.91" (23.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1/2" (12.7)
SK-9850	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5) 1/2" (12.7)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1/2" (12.7)
SK-9860	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.04" (26.3)	3/8" (9.5) 1/2" (12.7)	0.83" (21.0)	0.93" (23.6)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	3/8" (9.5)
SK-9870	2.84" (72.0)	2.21" (56.0)	1.01" (25.6)	1.34" (34.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	1/2" (12.7)

*OEM or special spec. & material as per your request.




Stainless Steel Security Solutions



Stainless Steel Guarded Padlok

- 100% stainless steel with brushed finish.
- The lock body has shackle guards to provide additional protection for the shackle.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents.




*Specifications are subject to change without notice.

UNIT: inch / (mm)

Model No.	A	B	C	D	OE	F	G	TYPE OF L STOP PIN
SK-984638G	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.85" (21.7)	3/8" (9.5)	0.91" (23.0)	1.32" (33.6)	A
SK-985638G	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5)	1.02" (26.0)	1.44" (36.6)	A
SK-985624G					1/2" (12.7)			
SK-986638G	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	3/8" (9.5)	1.26" (32.0)	1.65" (42.0)	H
SK-986624G				1.13" (28.8)	1/2" (12.7)	0.93" (23.6)	1.42" (36.0)	F
SK-987624G	2.83" (72.0)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	1/2" (12.7)	1.50" (38.1)	1.73" (44.0)	H

*OEM or special spec. & material as per your request.





Stainless Steel Padlok

- 100% stainless steel with brushed finish.
- Every cylinder has a unique key code with the option of either 180-degree (for SK-98SA series) or 270-degree (for SK-98S series) operating radius.
- All locks can be keyed different, alike or master keyed across all lock series.
- Removable cylinders are compatible and interchangeable within a lock series.
- Protected by worldwide patents



*Specifications are subject to change without notice

UNIT: inch / (mm)

Model No.	A	B	C	D	ØE	F							TYPE OF L STOP PIN
SK-984638	2.01" (51.0)	2.21" (56.0)	1.01" (25.6)	0.89" (21.7)	3/8" (9.5)	0.71" (18.0)	0.91" (23.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985638	2.17" (55.0)	2.21" (56.0)	1.01" (25.6)	0.84" (21.3)	3/8" (9.5)	0.71" (18.0)	1.02" (26.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	A
SK-985624					1/2" (12.7)								
SK-986638	2.50" (63.5)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	3/8" (9.5)	0.83" (21.0)	1.26" (32.0)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H
SK-986624				1.13" (28.8)	1/2" (12.7)	0.83" (21.0)	0.93" (23.6)						F
SK-987624	2.83" (72.0)	2.21" (56.0)	1.01" (25.6)	1.26" (32.0)	1/2" (12.7)	0.83" (21.0)	1.50" (38.1)	2.0" (50.8)	3.0" (76.2)	4.0" (102.0)	5.0" (127.0)	6.0" (152.4)	H

*OEM or special spec. & material as per your request.